



ASSEMBLY INSTRUCTION



A x1

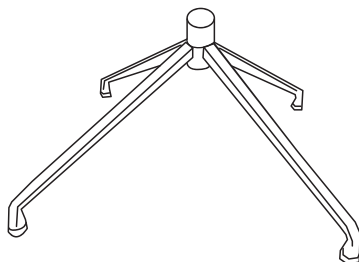


B x1



C x1

STEP 1


Insert gas lift C into the four-pronged base B.

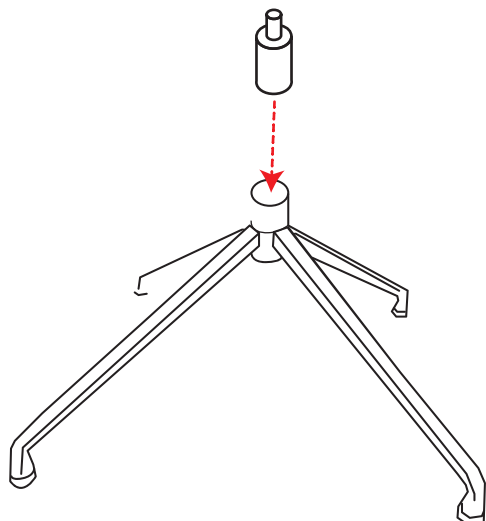

STEP 2

Turn seat A upside down, then fit the base (with the swivel axis installed in Step 1) into the underside of seat A.

Make sure the two single legs are aligned with the front of the seat!

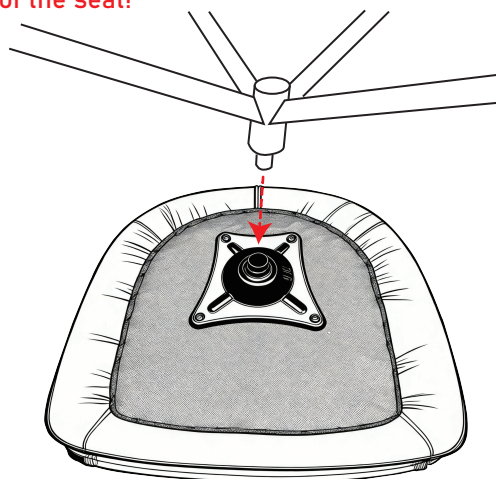

STEP 3

Turn the seat right side up, and the assembly will be finished.

