




NO.	PART.	Qty.	NO.	PART.	Qty.
1	77	7	D2	1898mm	60
2		14	Q1	6	4
3	1620mm	14	Q2		2
4	1546mm	36	Q3		10
6	1080mm	4	Q4		7
7	1256mm	6	Q5		14
7B	956mm	2	Q6		14
8	1574mm	8	Q7		72
8L	1604. 5mm	2	Q8	₹ 420mm	4
8R	1604. 5mm	2	Q9	0	182
9	1906mm	4	Q32	M4x14mm	310+10
10	1544mm	24	Q13	∰ mm M5x16mm	356+10
14	1613mm	4	Q14	M6x38mm	72+3
D1	1650mm	12	Q15	M6x55mm	118+3


NO.	PART.	Qty.	NO.	PART.	Qty.
Q16	M6x65mm	64+2	Q22		2
Q17	M6	254+5	Q23		1
Q18		310+10	Q24		1
Q19		300+10	Q25		1
Q20		182+10	Q26		1
Q21	M8x50mm	32	Q27		1


NO. PART. Qty.	
2 6	
Q15 12	
Q17 Q 12	
Q20 O 12	
	2
(X3)	2
	Q17 Q20 Q20
	Q15)

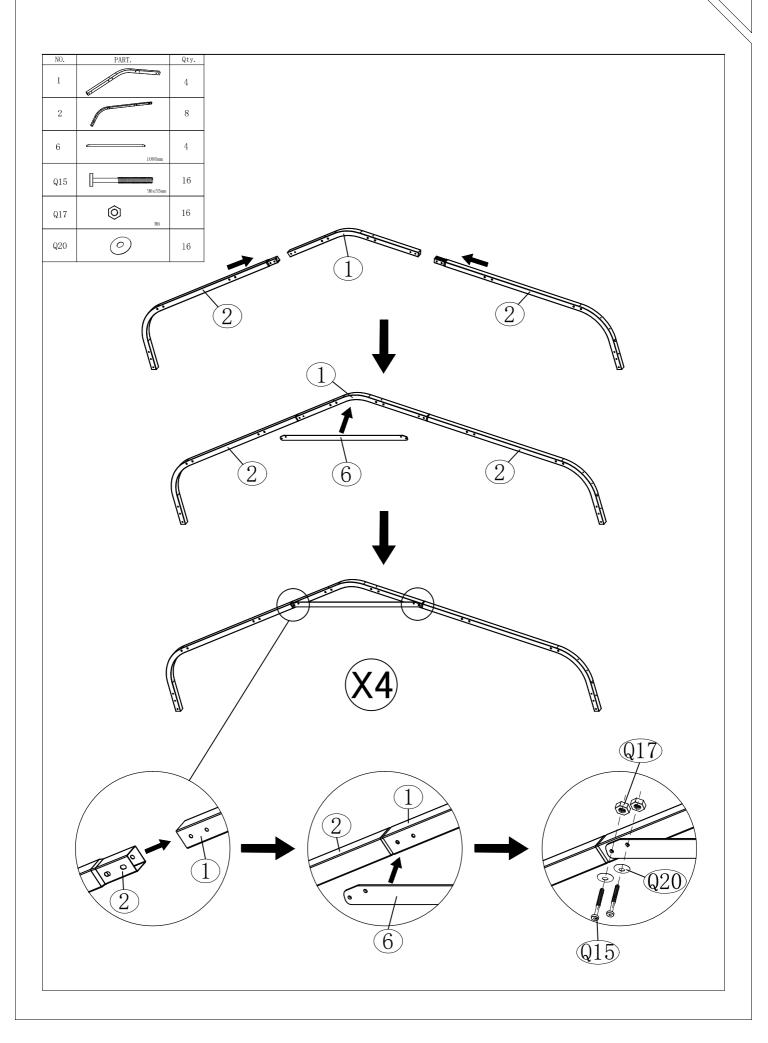


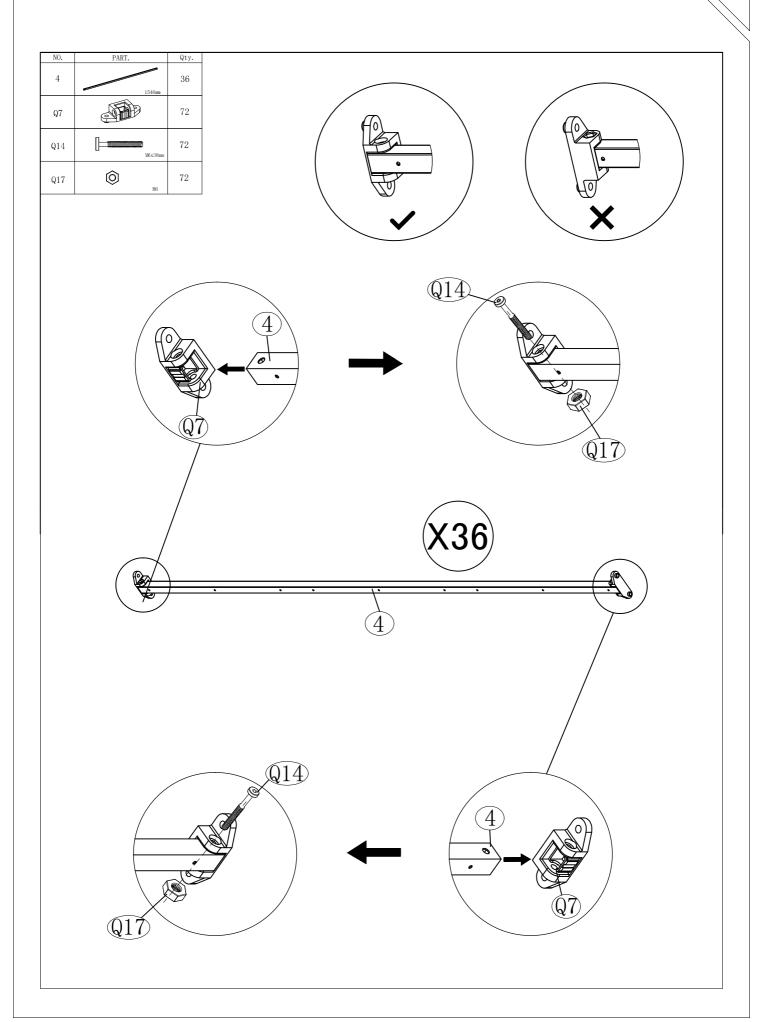


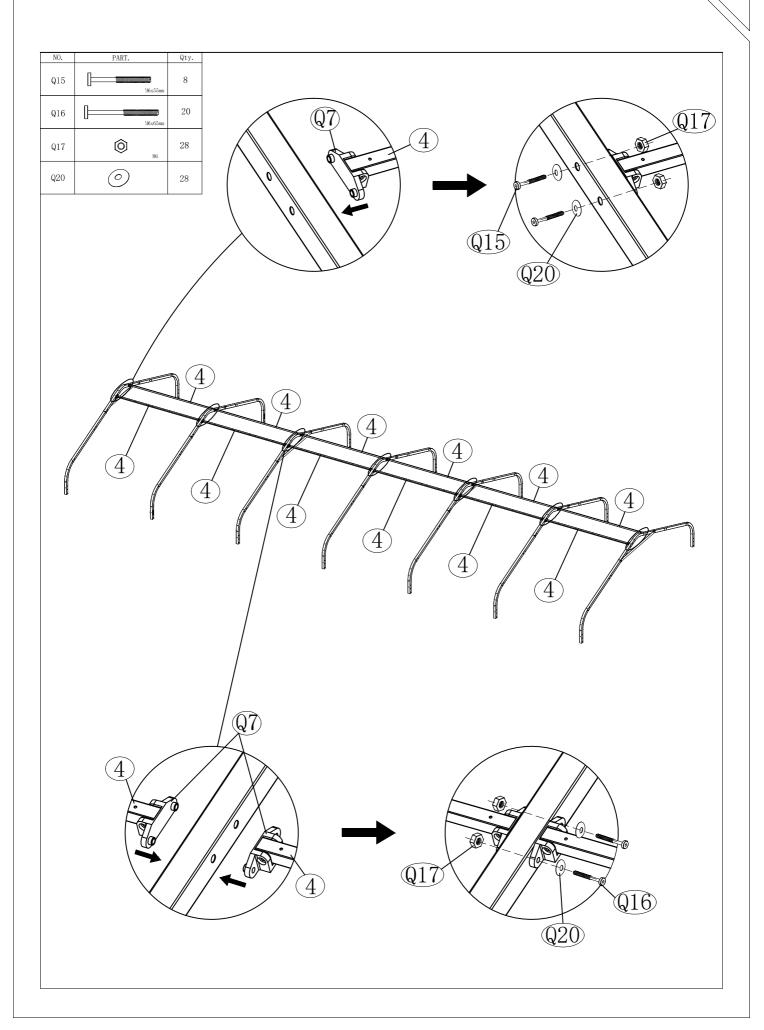


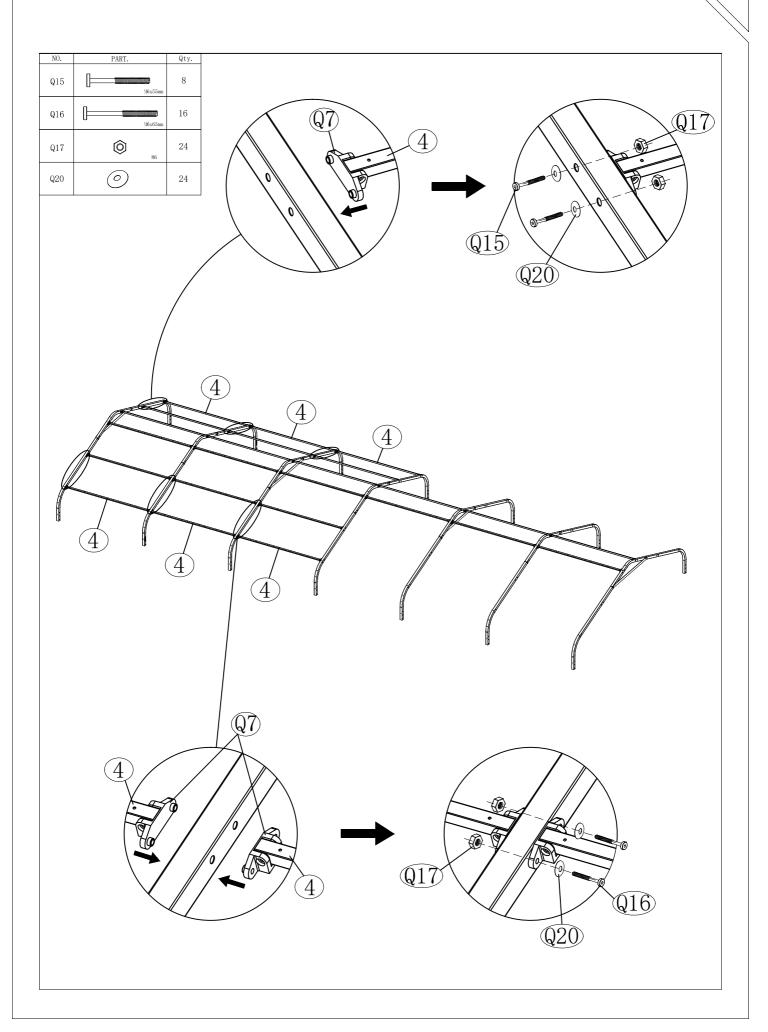


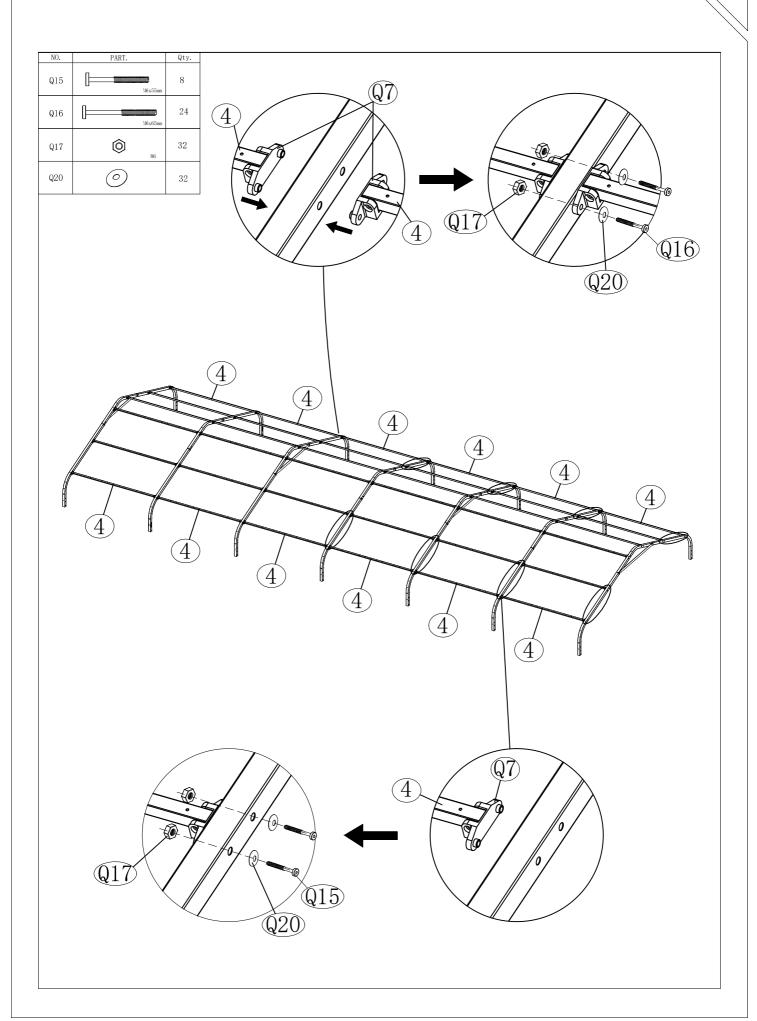

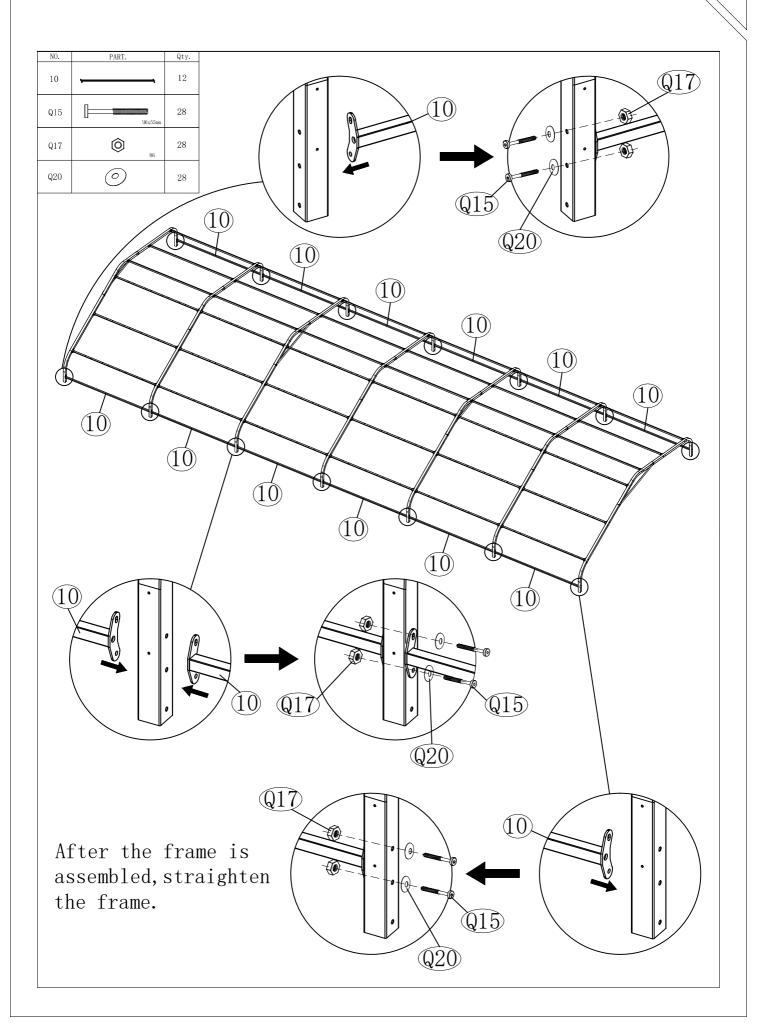

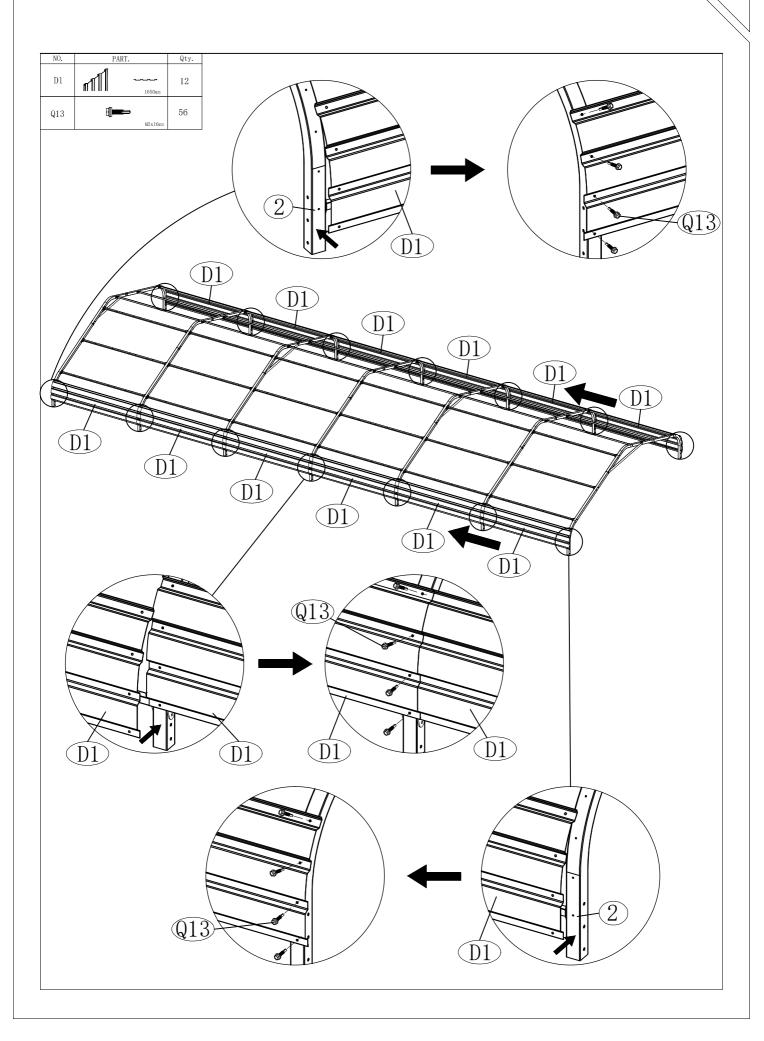


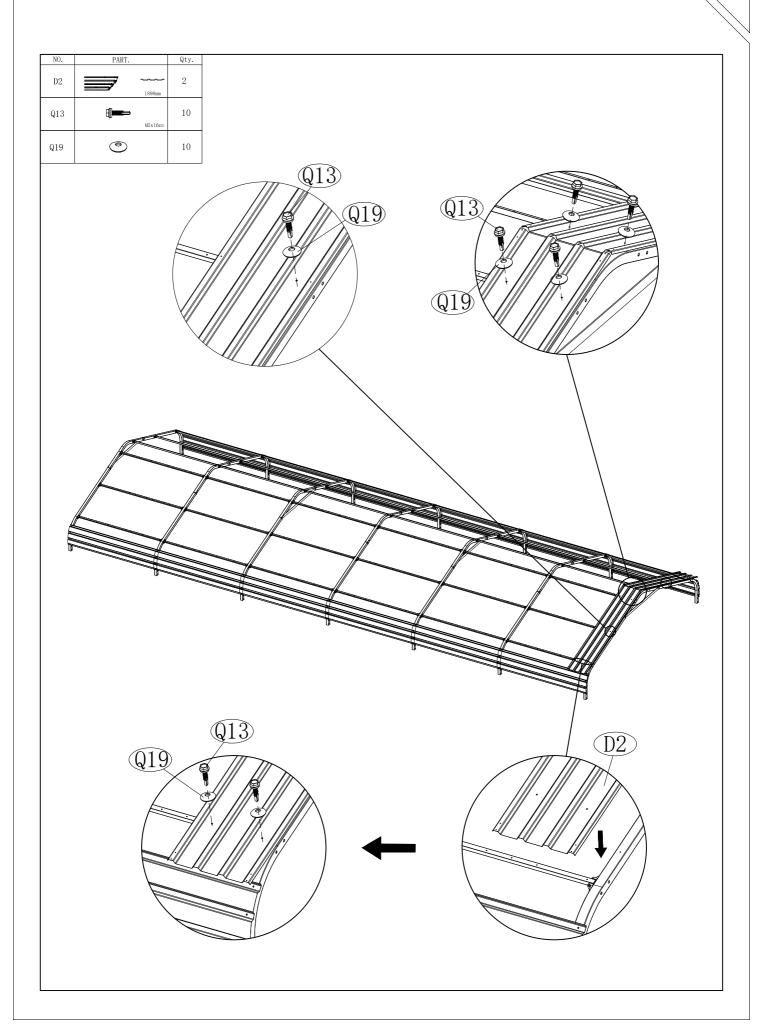


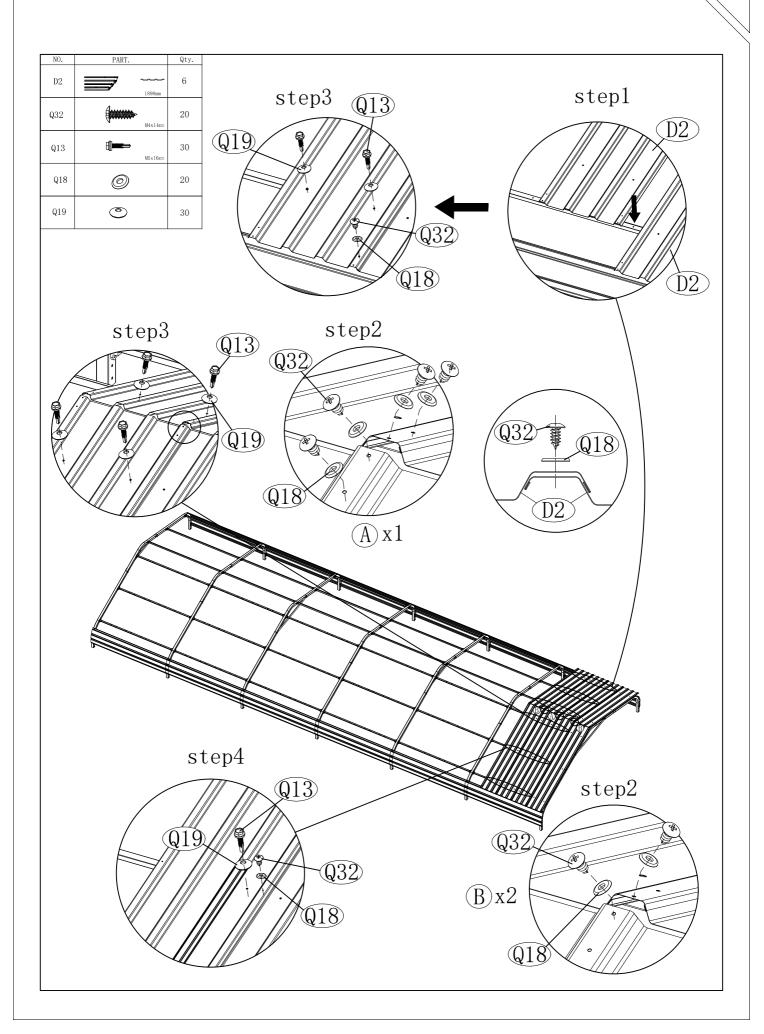



NO.	PART.	Qty.
Q32	M4x14mm	2
Q18	0	2
Q4		1


D2 Install plastic Q4 between the 3th and 4th pieces

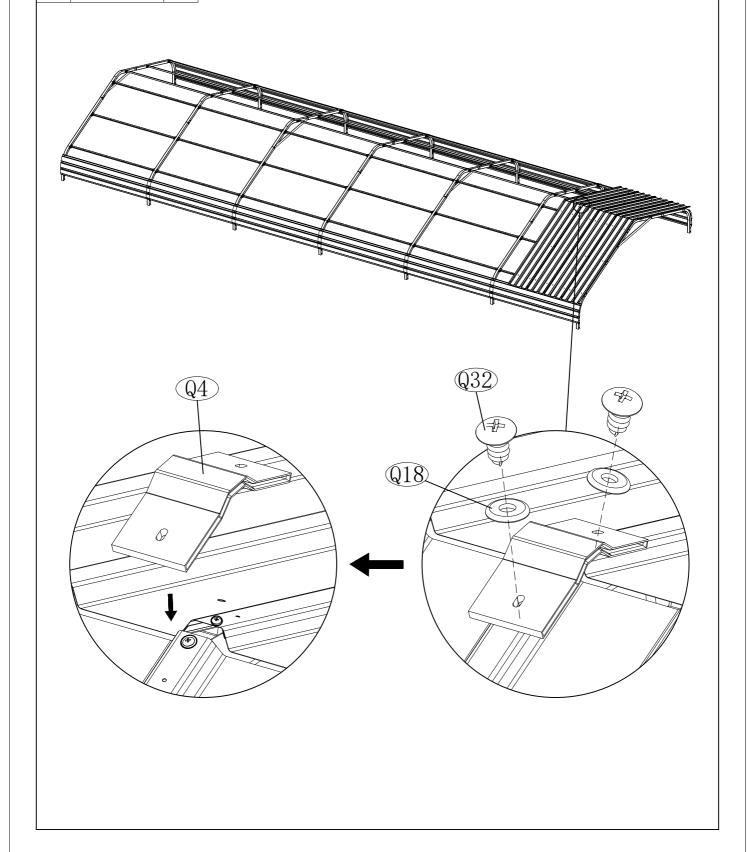


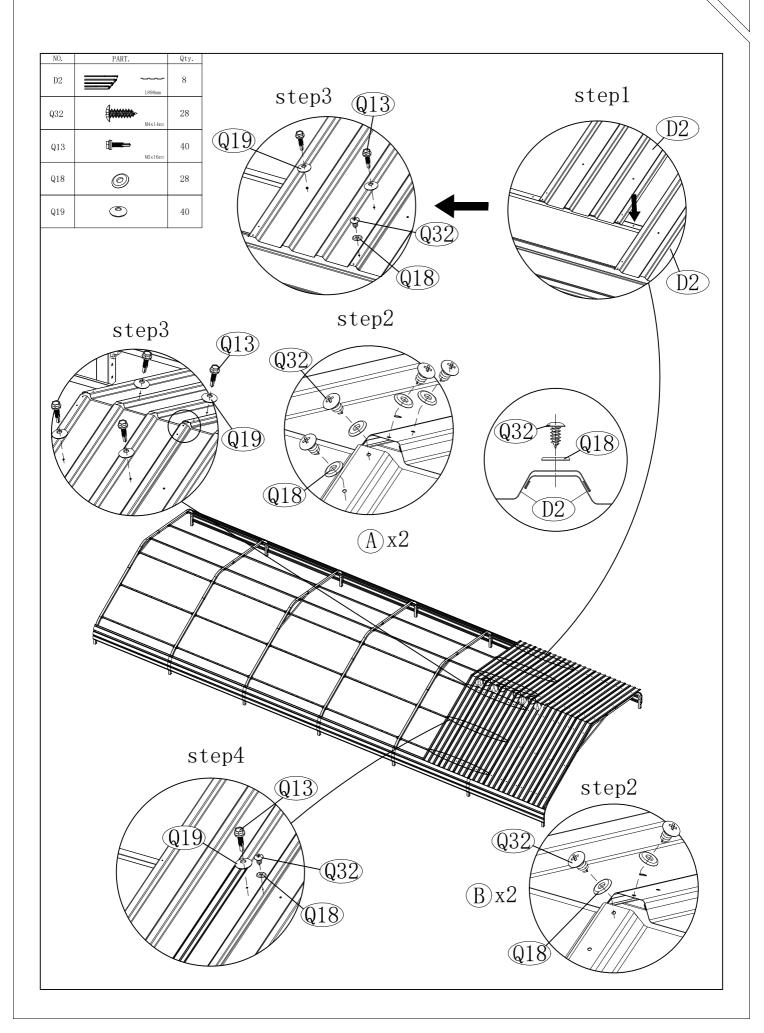


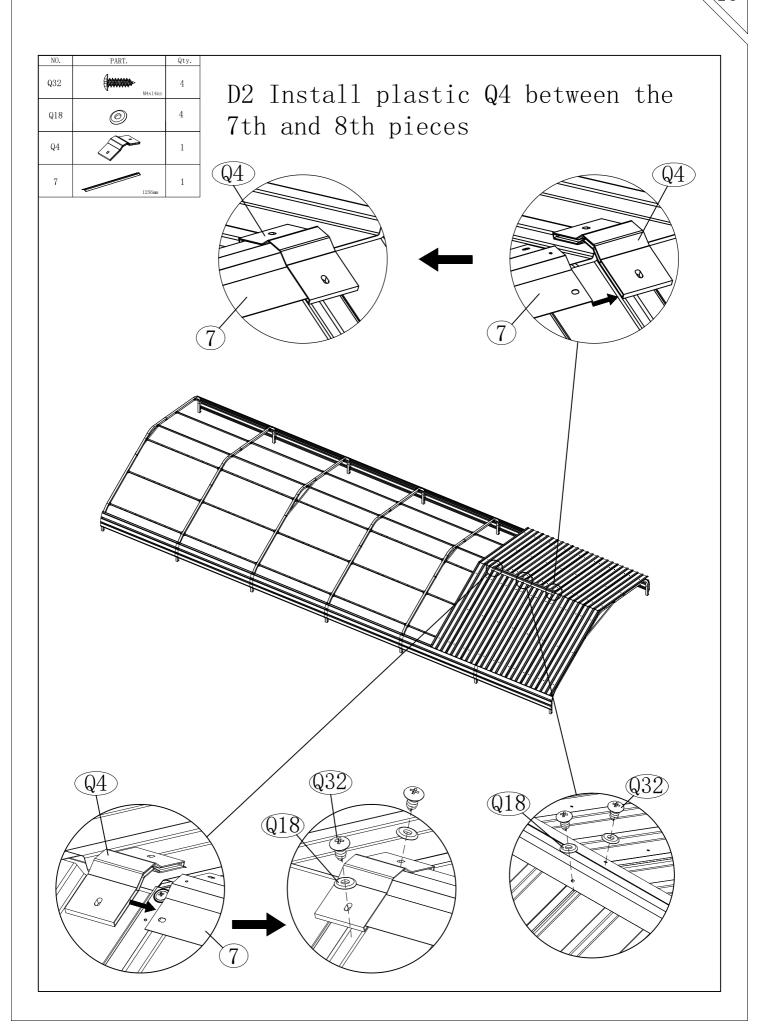


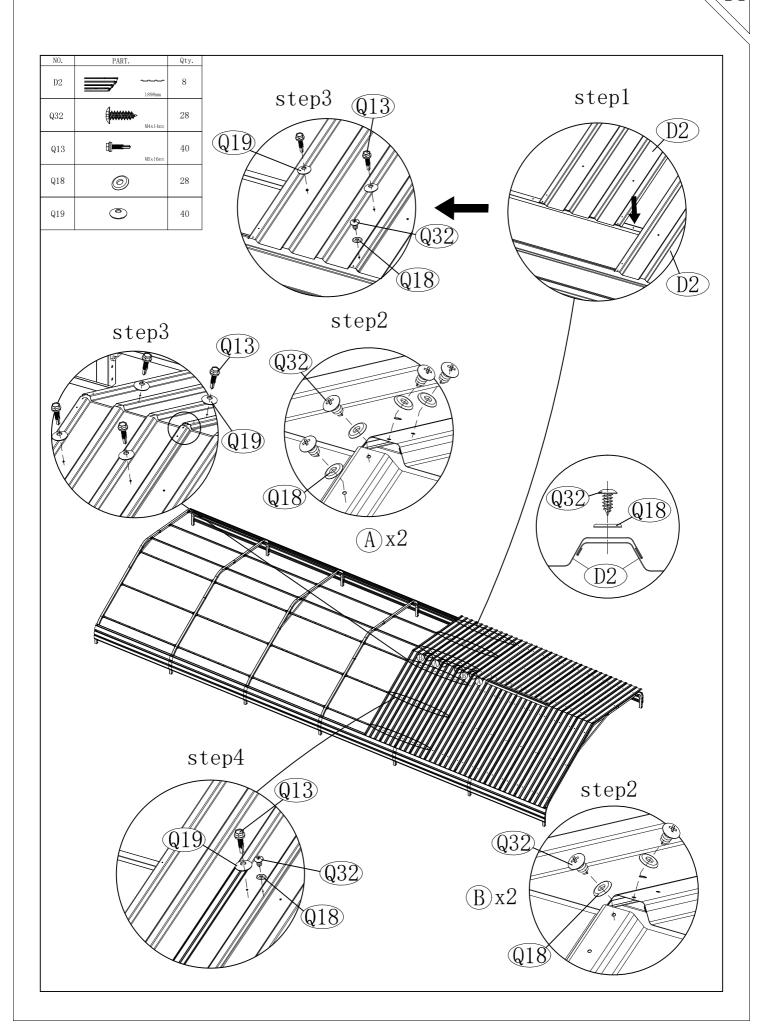


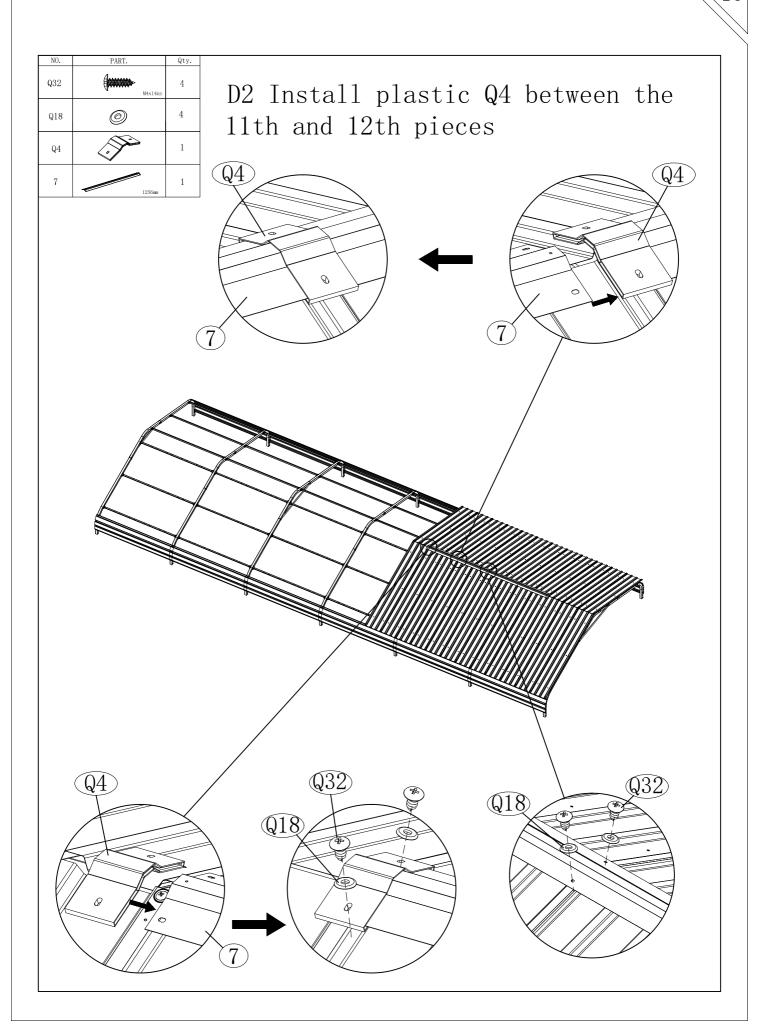


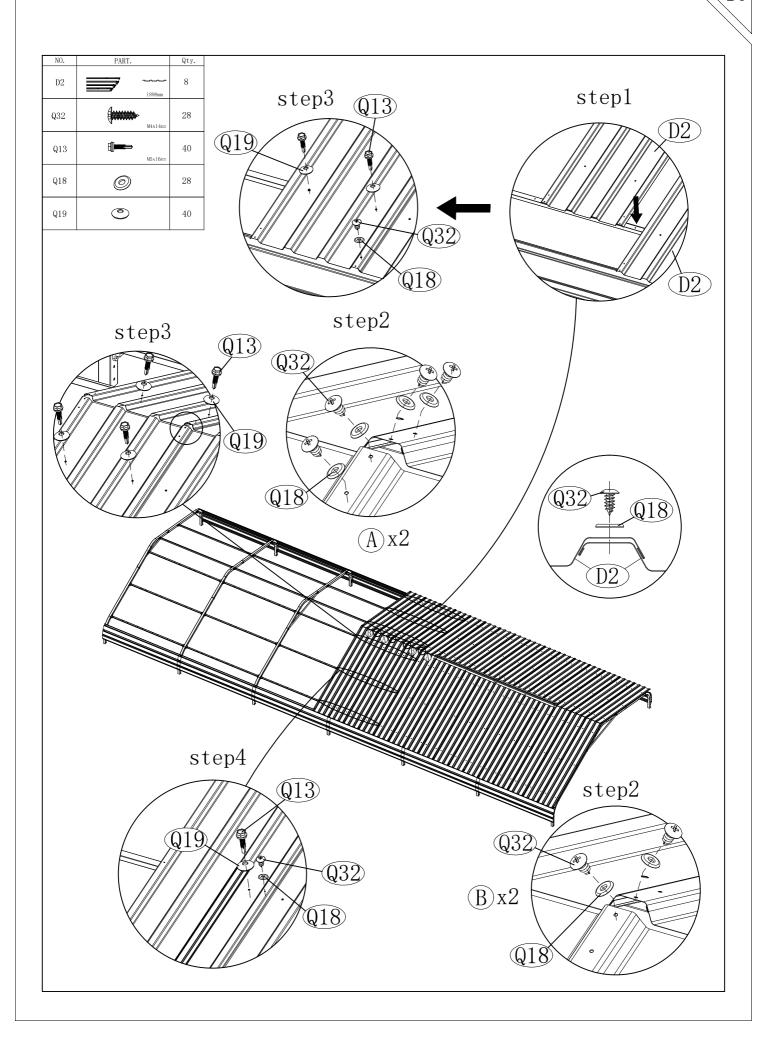


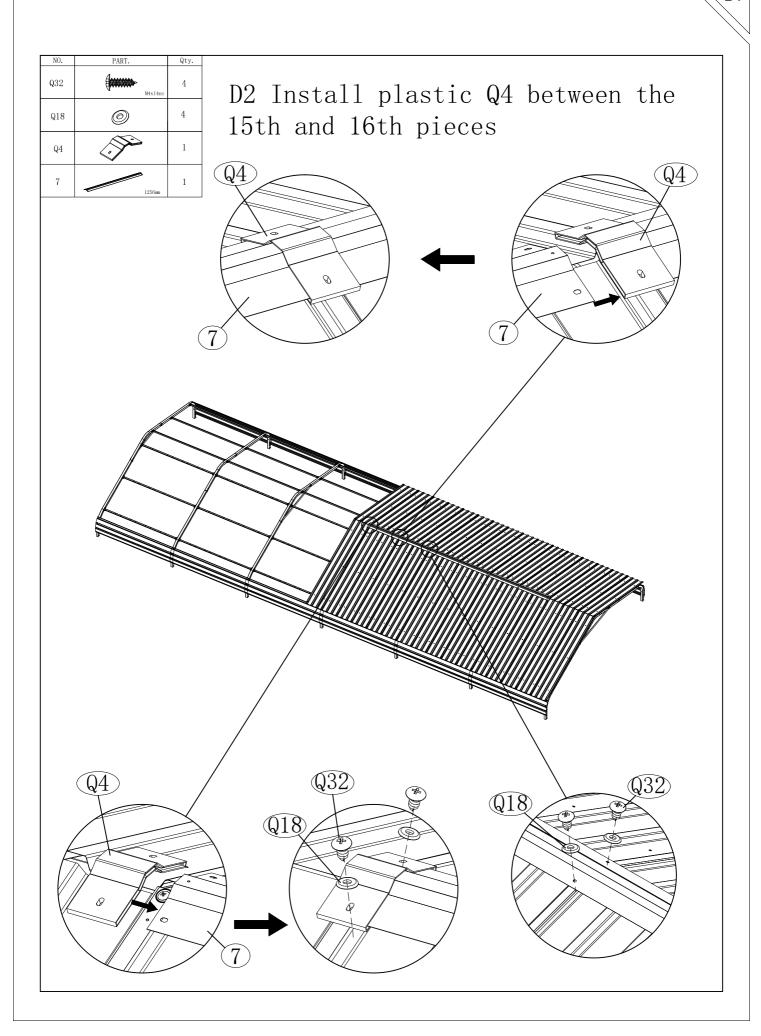


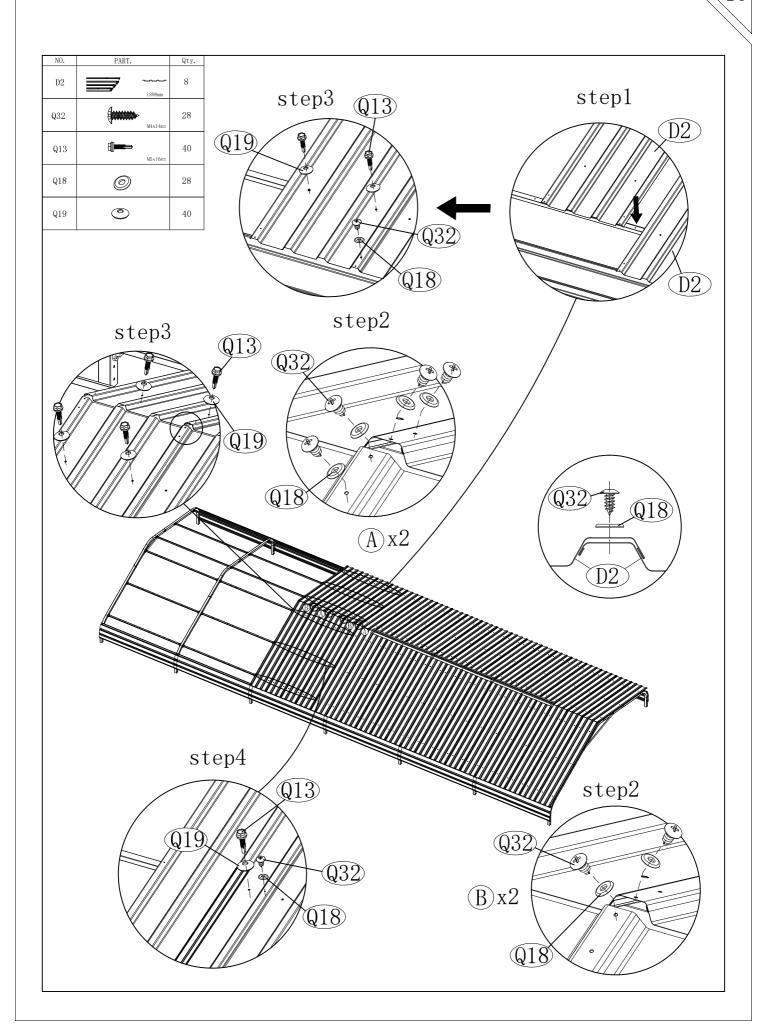


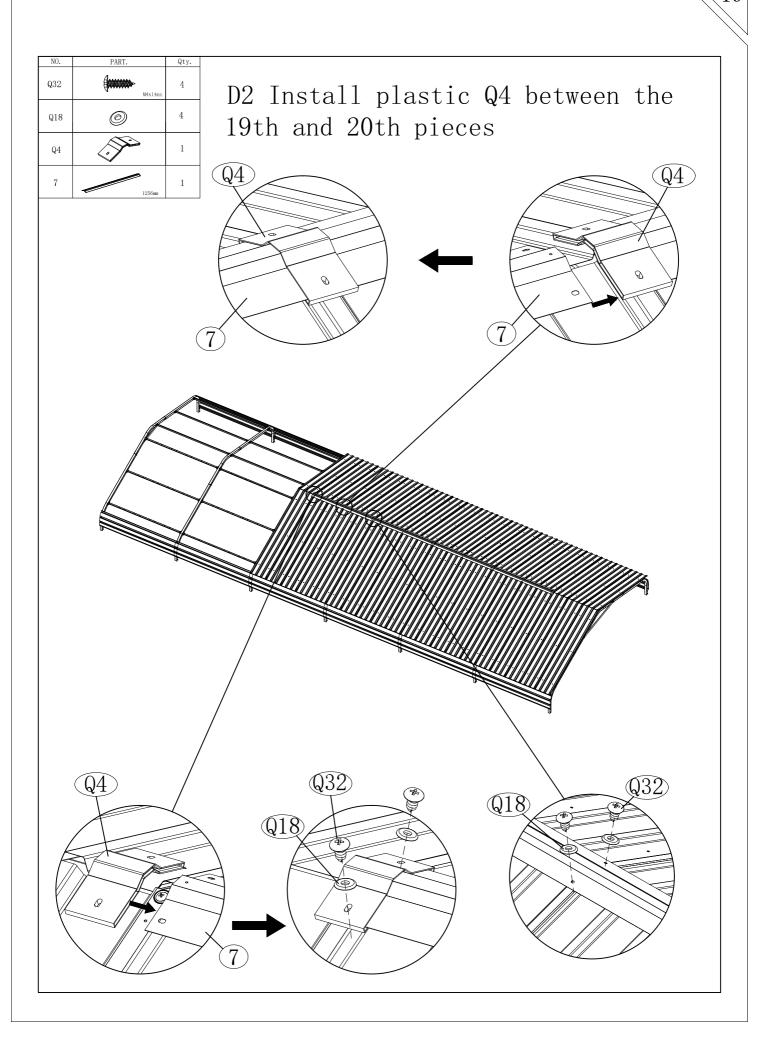


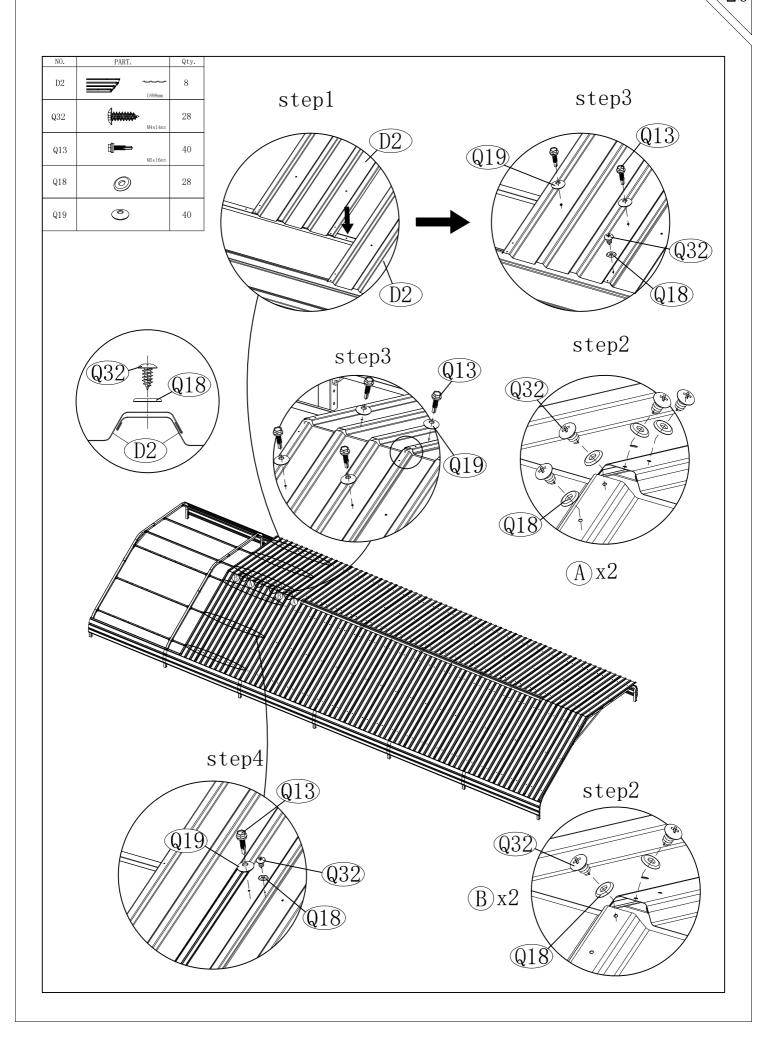


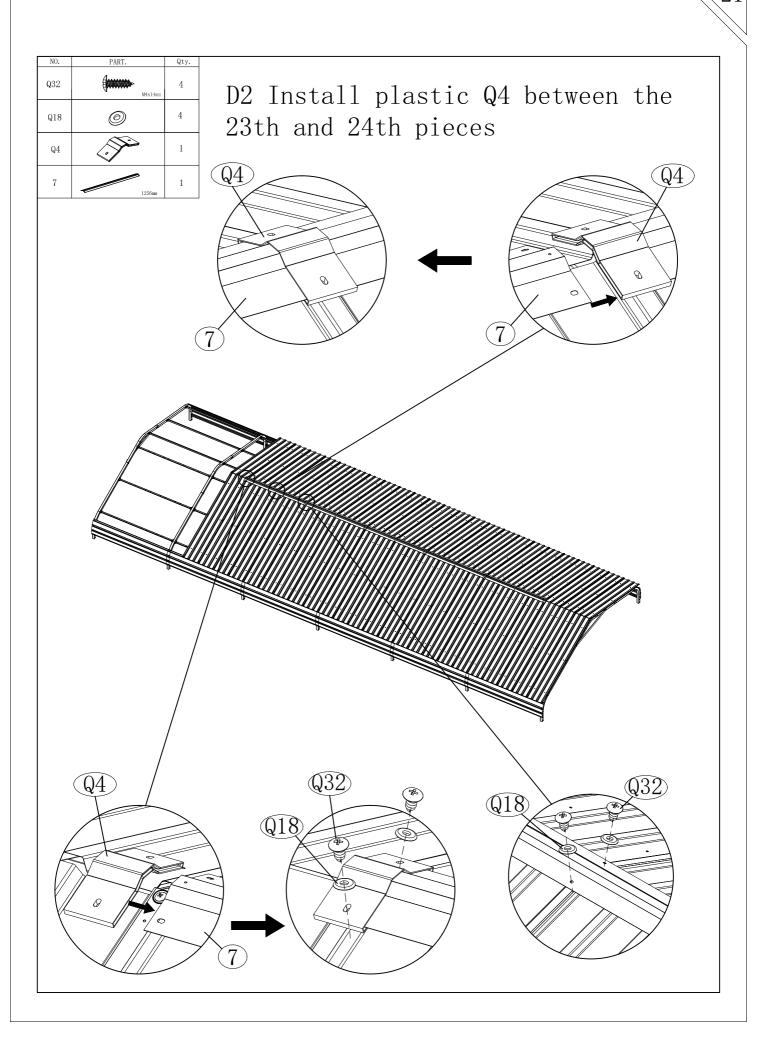


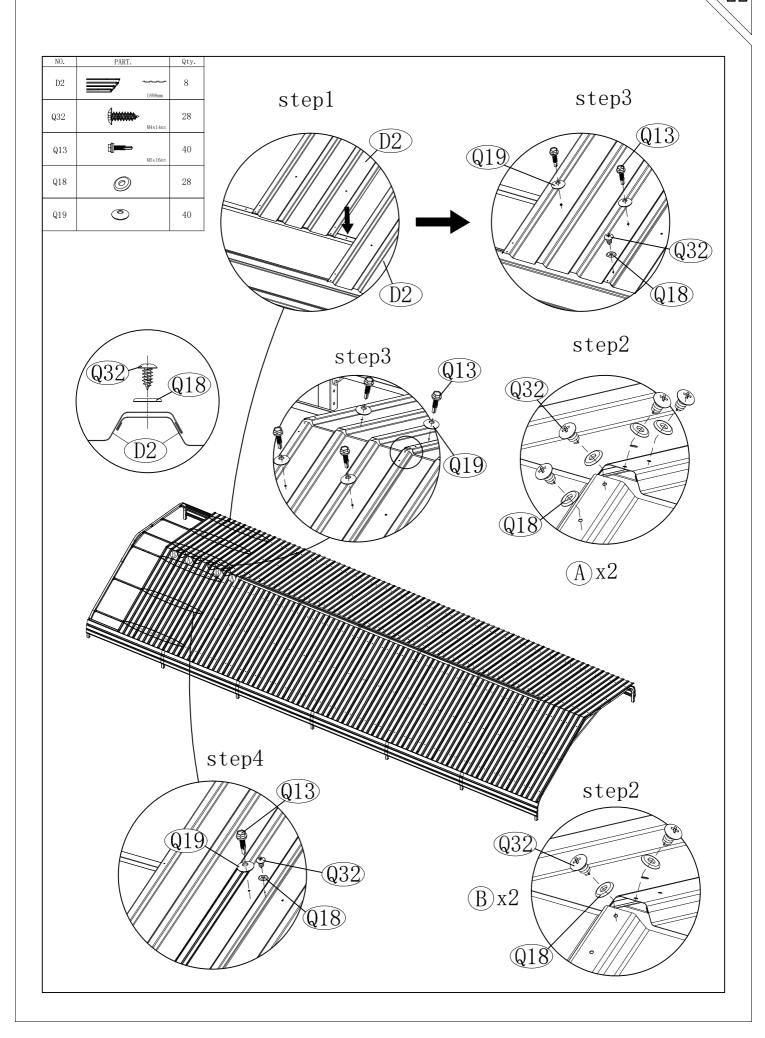


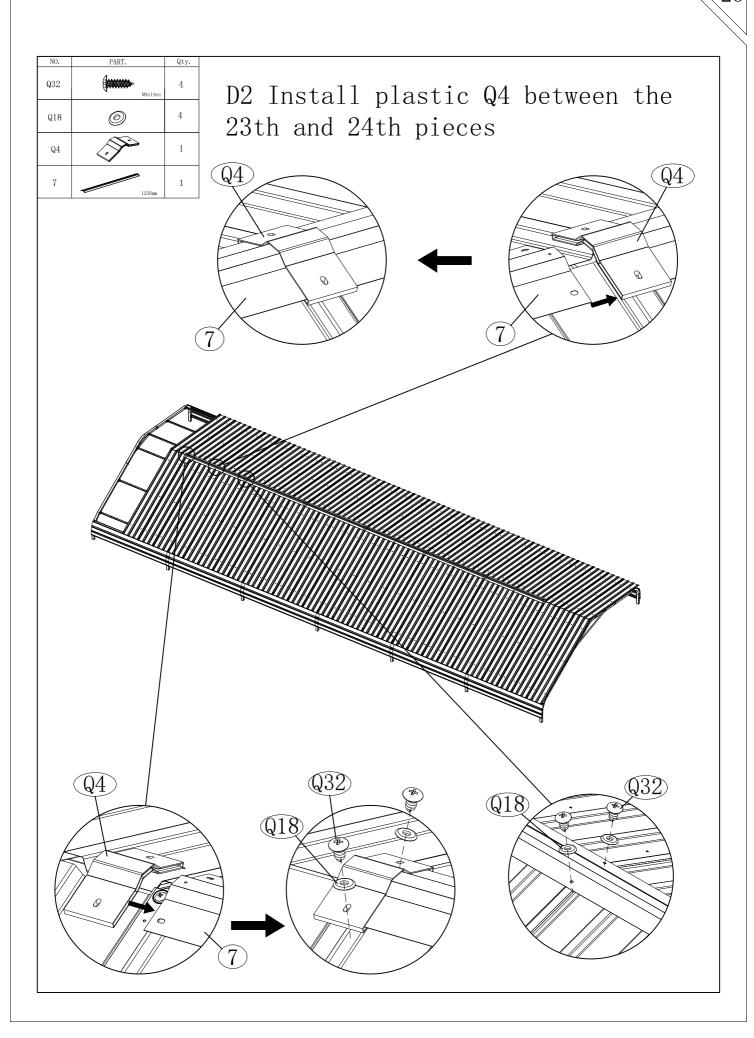


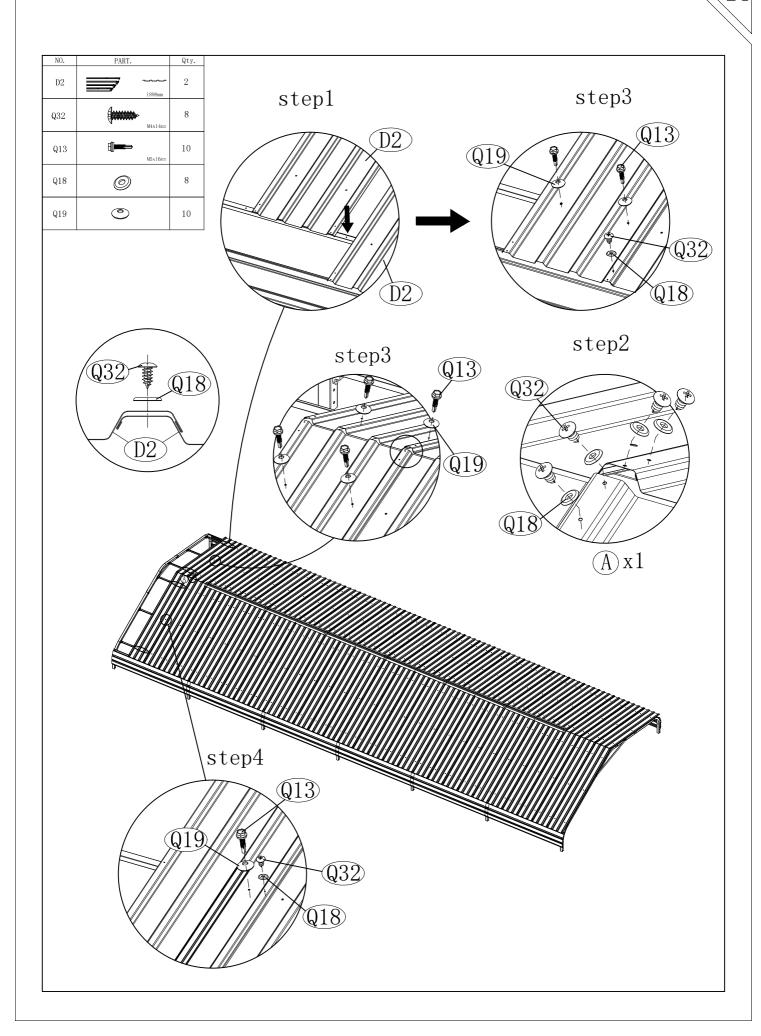


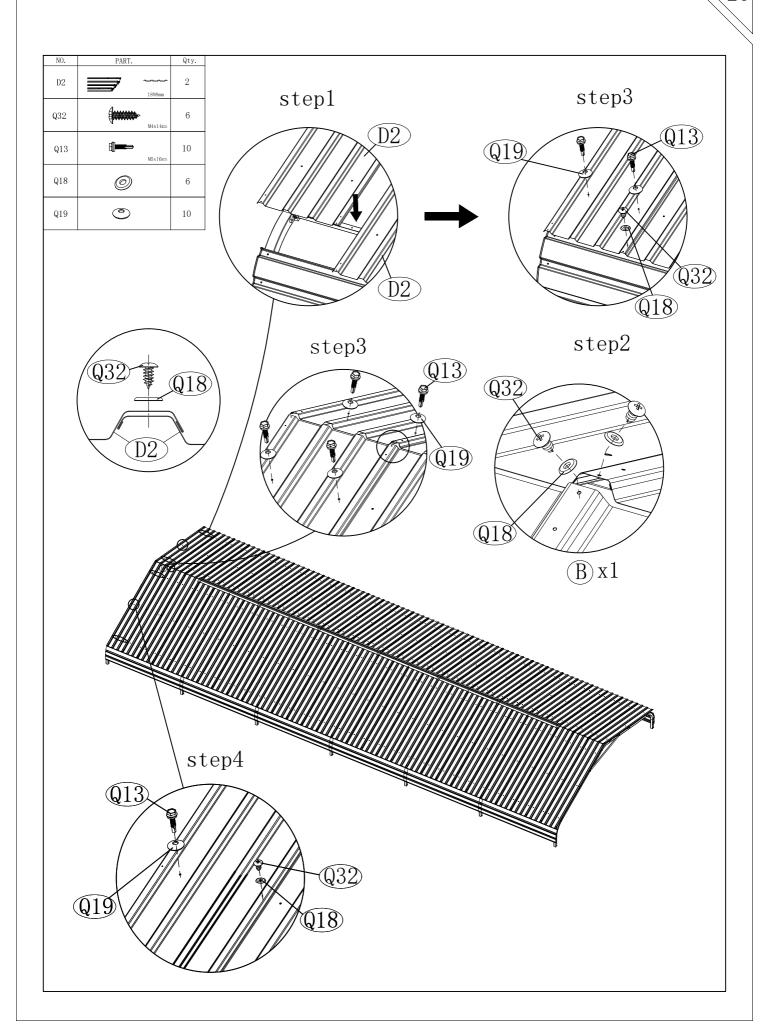


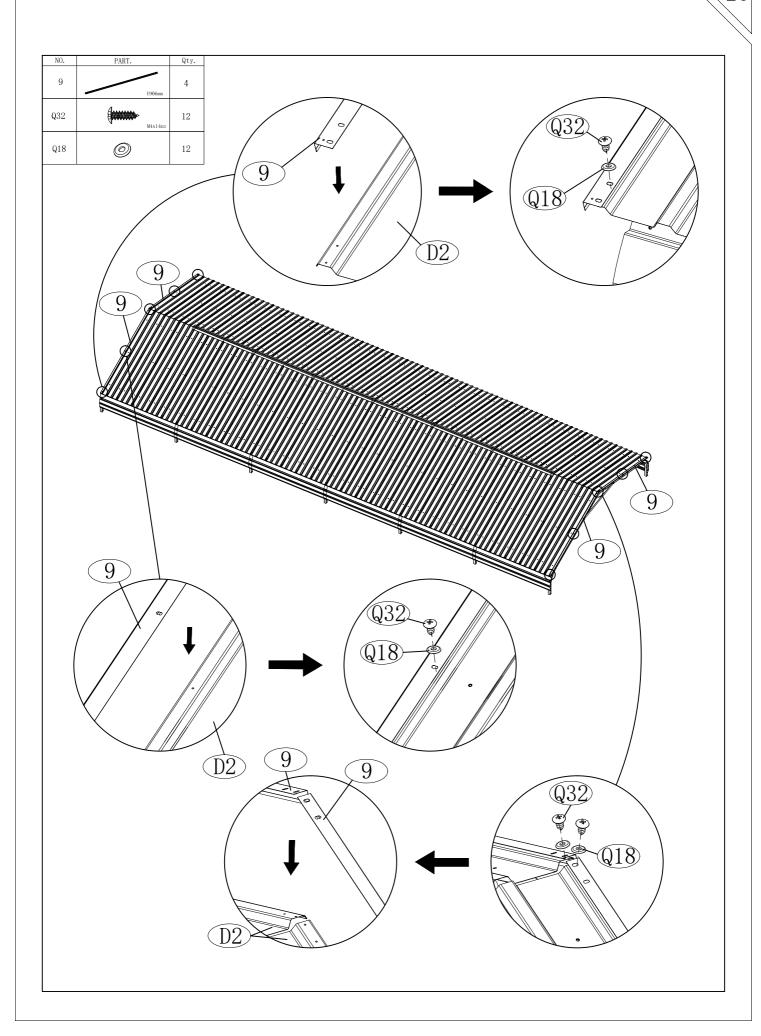


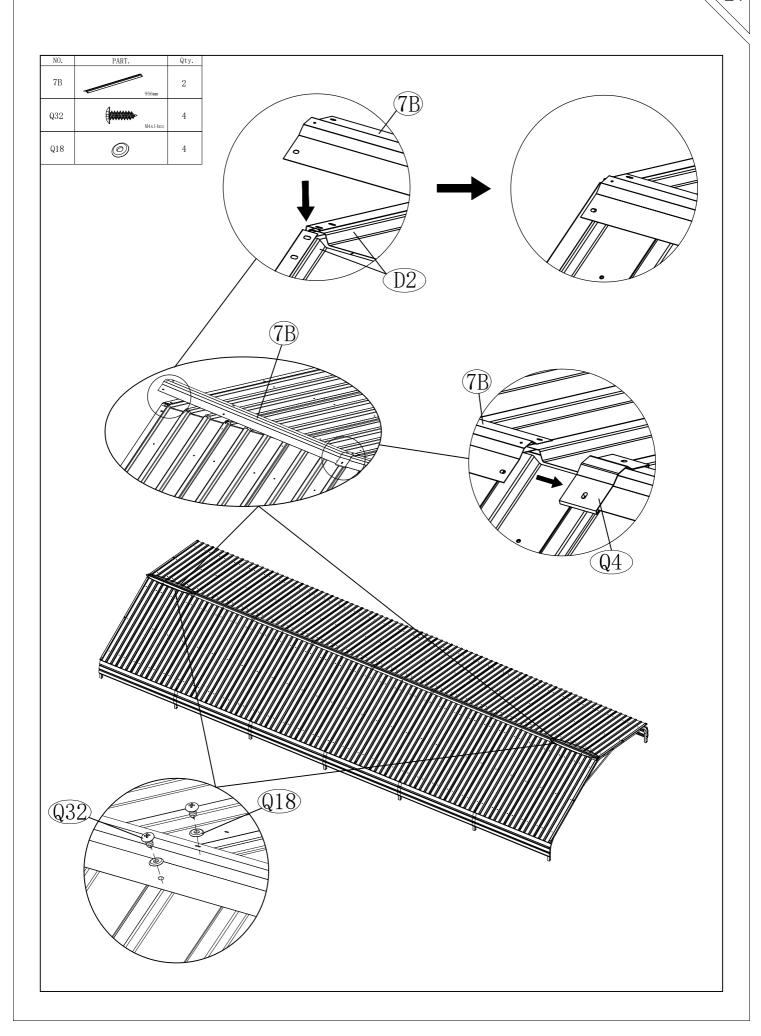

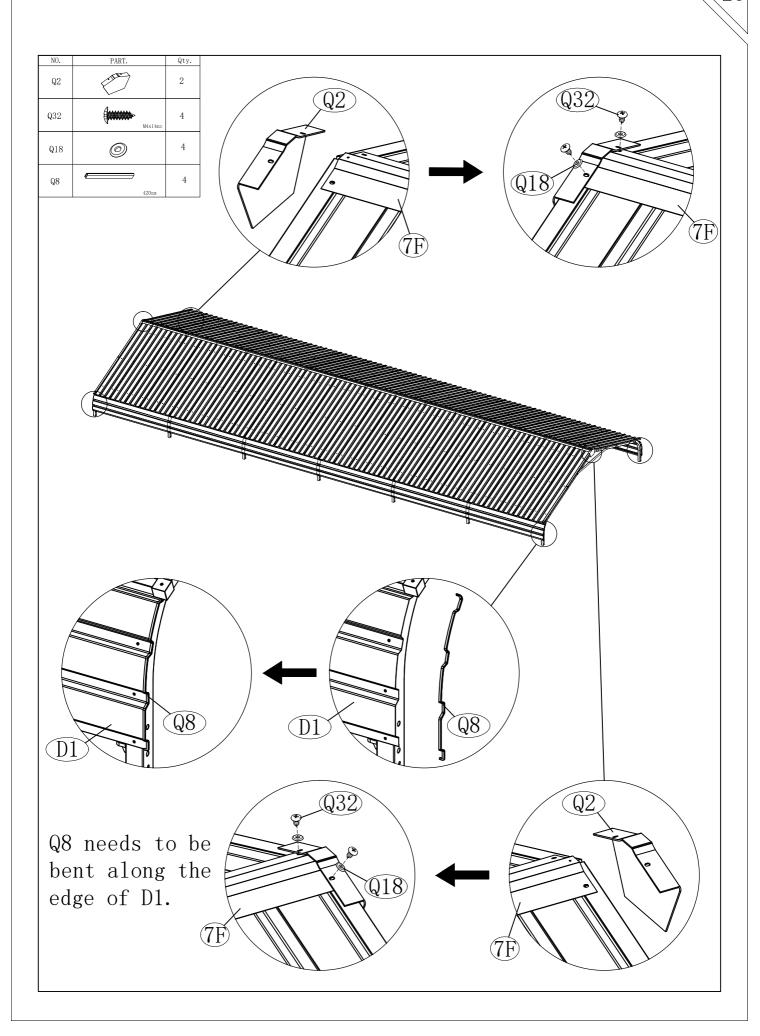

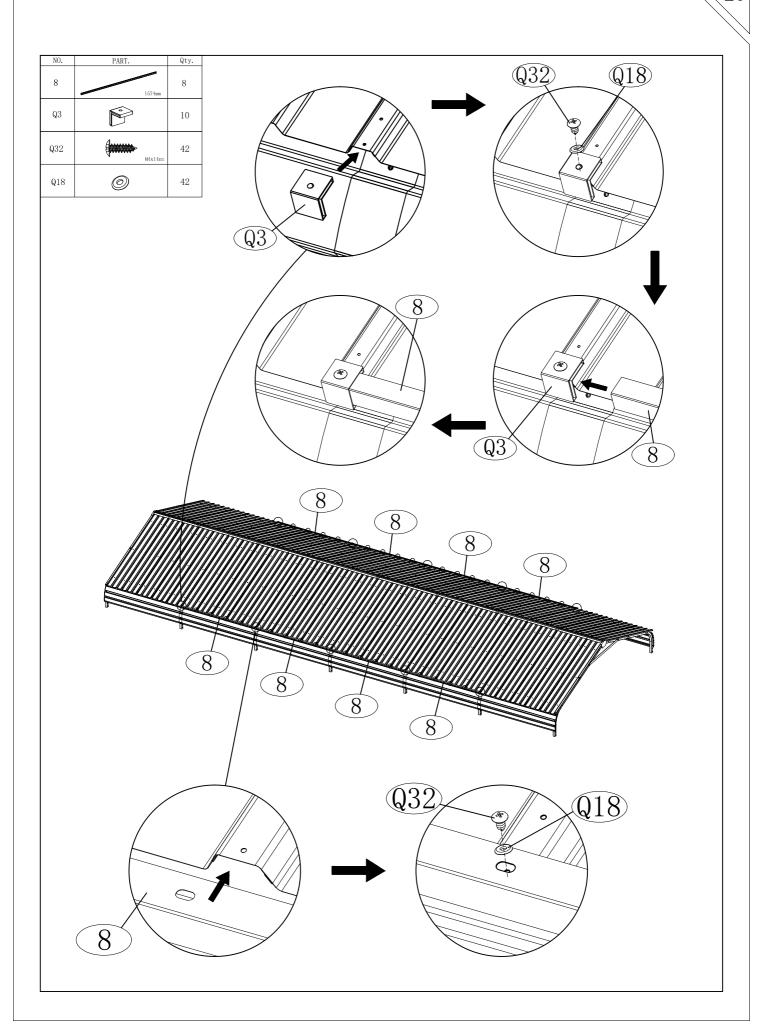

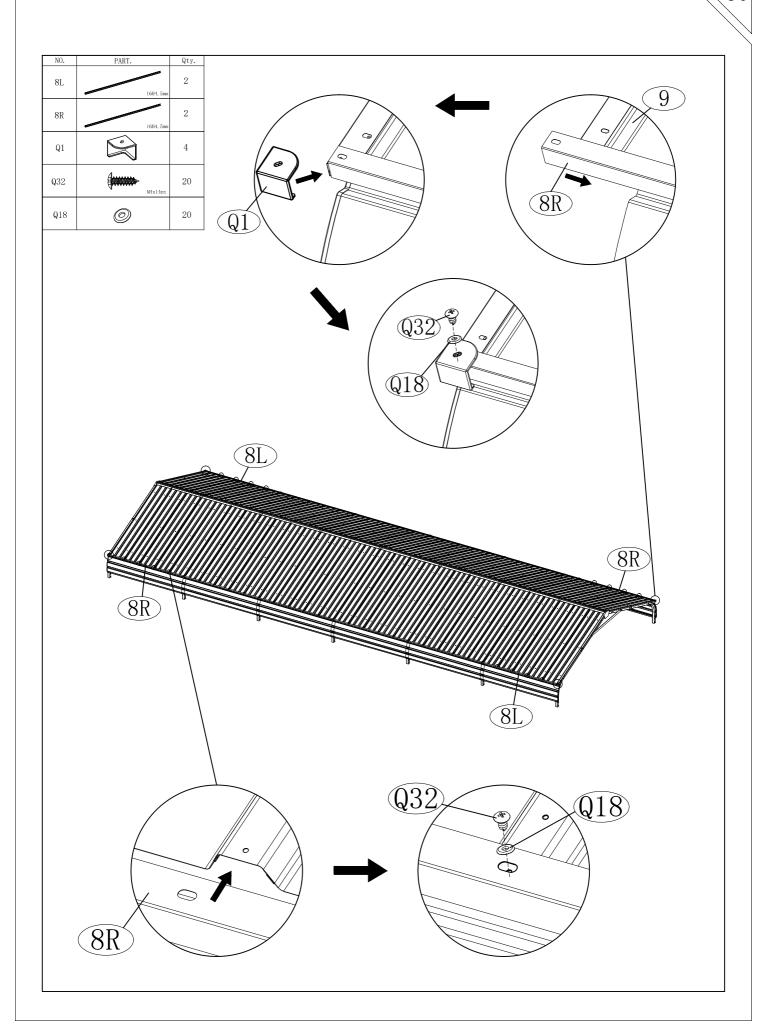

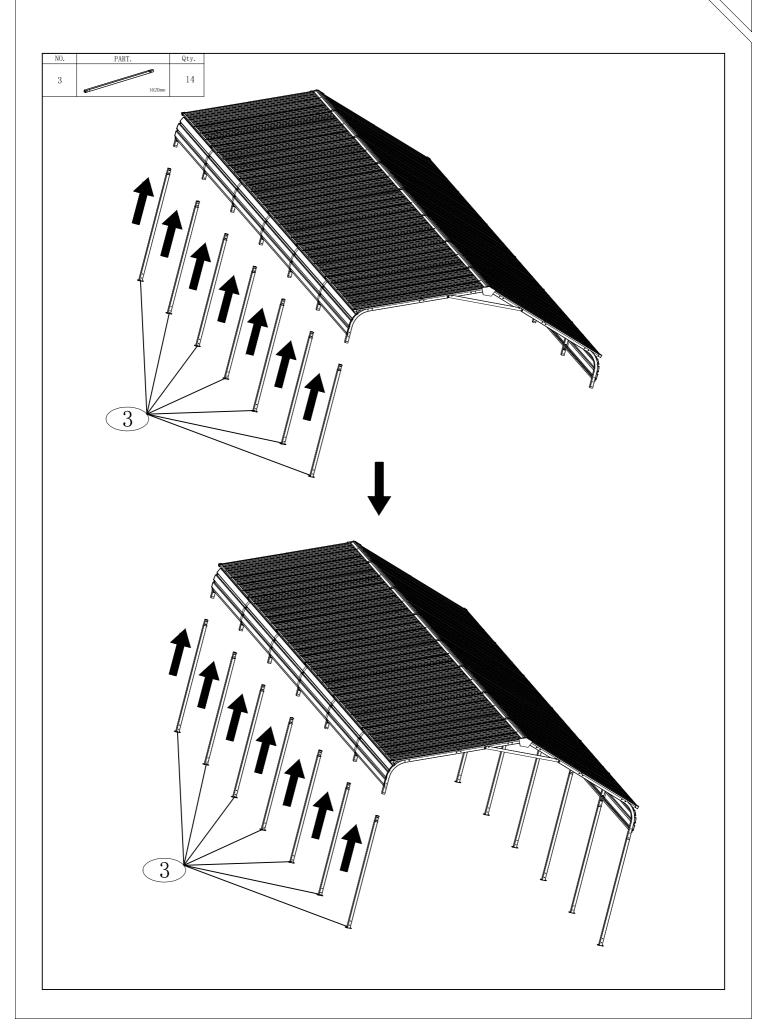

NO.	PART.	Qty.	
Q15		10	
Q17	© M6	10	
Q20	0	10	
	1		
		TE TE	
		Q17	
		\bigcirc	
		Q20	
		3	
1			


	Oty.
10	
Q15 M6x55mm	28
Q17 O 2	28
Q20 O	28
	Q17 Q15 Q15 Q15
	Q20 10 0


NO. PART.	Qty.
14	4
Q16	
Q17 (i) M6	4
Q20 O	4

	,	
NO.	PART.	Qty.
Q5		
Q6		14
Q21	∭⊒) M8×50mm	28
		1. It is necessary to use ground nails and expansion screws, whether installed on stable ground, to avoid the collapse of the car shed to the inside or nearby personnel causing devastating injuries and property losses.
	Q6	$\begin{array}{c} \bullet \\ \bullet \\ \hline \\ Q5 \end{array}$

© □□□	4
M8X3Umm	182
	M8x50mm

Plastic screw cap is used to prevent the sharp end of the screw from scratching people.



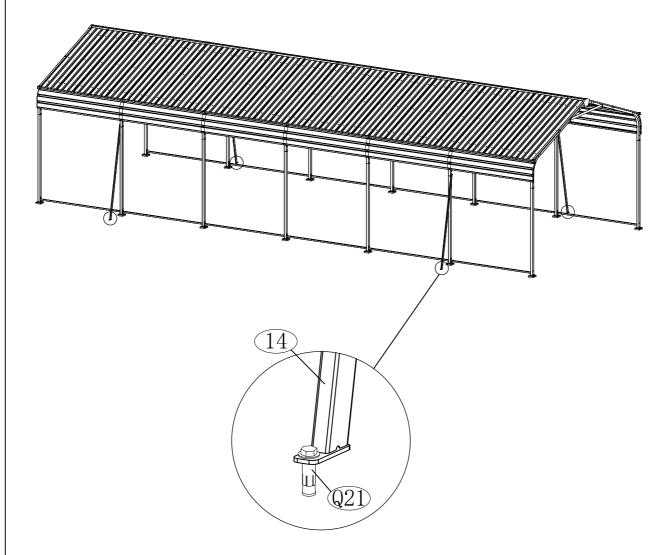

1. It is necessary to use ground nails and expansion screws, whether installed on stable ground, to avoid the collapse of the car shed to the inside or nearby personnel causing devastating injuries and property losses.